

U SEAL IT™

GLOSS SEALING


STEP 1: PREP

1. Prepare the floor with a Concrete DNA Double Sided Pad; 400 Grit.
 - a. Run the pad with plenty of water under a low-speed floor machine.
 - i. Add a dilution of Citra Pro to help clean the concrete
 1. Other strippers and cleaners are available for other situations such as glues and paints.
 - b. Squeegee water and remove from the floor with a wet/dry vac
 - c. Insure the floor is clean of dust and footprints by lightly mopping
 - d. Let the floor dry



STEP 2:

1. Seal the floor with Concrete Floor Supply Ez-Seal
 - a. Ez-Seal can be applied with a 3/8th Nap roller
 - b. Apply at least 2 coats
 - c. Allow the floor to sufficiently dry before use; typically, 24-Hours for light traffic.

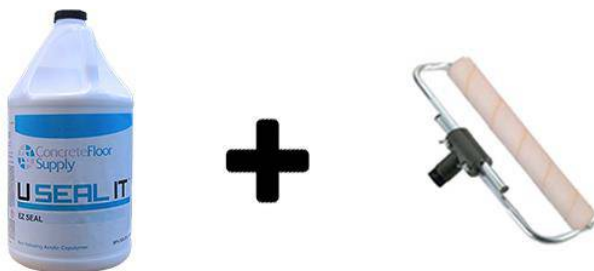

STEP 3:

1. Utilize Ez-Clean for ongoing maintenance.

