


U POLISH IT™

POLISH CONCRETE LEVEL 2

STEP 1:

1. Run Concrete DNA satellite pads starting with the 50-Grit pad.
 - a. Utilize these pads on a low speed floor buffer, auto scrubber or propane burnisher.
 - i. Double Pass each grit.
 - ii. Run pads with plenty of water
2. Run grits in the following order:
 - a. 50-Grit, 100-Grit, 200-Grit
3. **DO NOT** skip grits.
4. Squeegee dirty water off the floor **between grits** before it has time to dry.

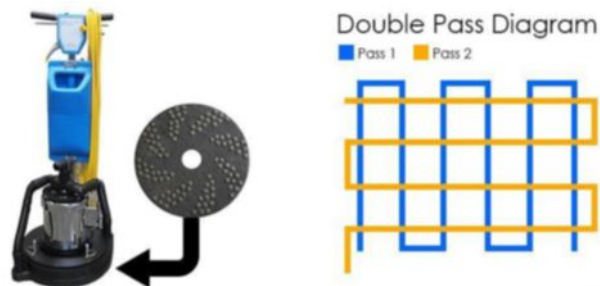

STEP 2: APPLYING DENSIFIER

1. Clean the floor thoroughly **DO NOT LEAVE DUST MARKS OR FOOTPRINTS**
2. Densify floor with Concrete DNA Densifier. Apply at a rate that the floor stays wet with the densifier for 15-minutes or more; *typically, 300-500 square feet per gallon.*
 - a. **Note: It is best to let densifier dry overnight to further harden the floor.**
 - b. *If you are applying color wait to dye and densify after 400-Grit.*



STEP 3:

1. Continue polishing the floor with the Concrete DNA Satellite Pads in the following order. **These pads should be ran wet.**
 - a. 400-Grit
 - i. If you are applying color you would apply it after this grit. Then densify.
 - b. 800-Grit
 - c. 1500-Grit



2. Thoroughly clean the floor

STEP 4: APPLYING POLISH GUARD

1. Apply Concrete DNA Polishing Guard by spraying it on the floor and spreading it with a microfiber. Apply at least 1 thin coat.
2. After your floor is dry and cannot be marked by touching, buff with a Concrete DNA Double Sided 3000 Series Pad.

